

2905909

https://www.phoenixcontact.com/pc/products/2905909

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



1AC/1AC/750 VA uninterruptible power supply with integrated energy storage, lead AGM, VRLA technology, 24 V DC, 4 Ah for 230 V AC applications.

### **Product Description**

UPS modules with integrated energy storage are particularly space saving: UPS module and energy storage are combined in one housing. The TRIO AC-UPS ensures seamless transition to battery operation thanks to the pure sine curve. Connected industrial PCs can be shut down safely via the integrated USB interface.

### Your advantages

- Smooth transition, thanks to the pure sine curve: the sine generated in battery operation is synchronous with the mains previously used for supply
- · Space saving: UPS module and energy storage combined in one housing
- · Long buffer times with integrated VRLA energy storage, can be extended with additional energy storage
- · USB interface for connection to higher-level controllers such as industrial PCs
- · Startup from energy storage possible, even without mains input



2905909

https://www.phoenixcontact.com/pc/products/2905909

### **Commercial Data**

Item number	2905909
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	CMUO15
Catalog Page	Page 332 (C-4-2019)
GTIN	4055626007502
Weight per Piece (including packing)	6,322 g
Weight per Piece (excluding packing)	6,009 g
Customs tariff number	85044030
Country of origin	DE



2905909

https://www.phoenixcontact.com/pc/products/2905909

### **Technical Data**

### Input data

AC	operation
----	-----------

Input voltage	230 V AC
Input voltage range	184 V AC 264 V AC
Voltage type of supply voltage	AC
Frequency range (f <sub>N</sub> )	45 Hz 55 Hz
	55 Hz 65 Hz
Current consumption	3 A (max.)
Power factor (cos phi)	0.8
Input fuse	10 A 400 V gRL
Permissible backup fuse	B6 B10 B16

### Digital Control (configurable)

Designation	Remote
Low signal	Connection to SGnd with < 2.7 k $\Omega$
High signal	Open (> 35 kΩ between Remote and SGnd)

#### Digital Control Low-Active (configurable)

Battery-operated start 230 V AC low signal	Connection to SGnd with < 2.7 $k\Omega$
Battery-operated start 230 V AC high signal	Open (> 200 k $\Omega$ between BatStart and SGnd)

### Output data

Classification according to IEC 62040-3	VFD-SS-311
Efficiency	> 95 % (100 % load, with charged energy storage)
	~ 81 % (100 % load )
Nominal output voltage	230 V AC
Form of output voltage	Pure sine
Nominal output current (I <sub>N</sub> )	3 A
Bridging time	60 s
UPS connection in parallel	no
UPS connection in series	no
Apparent power	750 VA
Nominal power	600 W (Real power)
Crest factor	2.8
Switch-over time	< 10 ms
Connection in parallel	no
Connection in series	No

#### Mains operation

· · · · · · · · · · · · · · · · · · ·	
Nominal output voltage	230 V AC
Nominal output current (I <sub>N</sub> )	3 A (750 VA)



2905909

Nominal output voltage	230 V AC
Nominal output current (I <sub>N</sub> )	3 A (750 VA)
Frequency (after automatic detection in mains operation)	50 Hz
	60 Hz
Signal: Alarm	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Battery mode	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Ready	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal:	
Signal ground SGnd	Reference potential for BatMode, Ready, Remote, and BatStart
Signal: Alarm	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Battery mode	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Ready	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal:	
Signal ground SGnd	Reference potential for BatMode, Ready, Remote, and BatStart
Signal: Alarm	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Battery mode	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Ready	
	24 V (SELV)
Output voltage	Z+ V (OLLV)



2905909

Continuous load current	≤ 20 mA
Signal:	
Signal ground SGnd	Reference potential for BatMode, Ready, Remote, and BatStart
Signal: Alarm	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Battery mode	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Ready	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal:	
Signal ground SGnd	Reference potential for BatMode, Ready, Remote, and BatStart
Signal: Alarm	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Battery mode	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Ready	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal:	
Signal ground SGnd	Reference potential for BatMode, Ready, Remote, and BatStart
Signal: Alarm	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Battery mode	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA
Signal: Ready	
Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA



2905909

https://www.phoenixcontact.com/pc/products/2905909

#### Signal:

	Reference potential for BatMode, Ready, Remote, and Bat Start
--	--

### Energy storage

Nominal voltage U <sub>N</sub>	24 V DC
Charge current	0.7 A 1.1 A
Nominal capacity	4 Ah
Nominal capacity range	4 Ah
Charging time	7 h
Buffer period	20 min. (100 W)
	4 min. (300 W)
	1 min. (600 W)
Latest startup date (battery only)	6 Months (0 °C 20 °C)
Latest startup (battery only) - range	6 Months 3 Months (20 °C 30 °C)
	3 Months 1 Months (30 °C 40 °C)
Battery technology	Lead rechargeable battery module
Memory medium	Lead rechargeable battery module
Accumulator type	2x Panasonic UP-VW1220P1 / BB Battery HR4.2-12FR
Can be extended with external battery	1x 24 V 4 Ah
Battery fuse	40 A, 32 V

#### Connection data

### Input

Connection method	Push-in connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Stripping length	10 mm

### Output

Connection method	Push-in connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm²
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Stripping length	10 mm



2905909

https://www.phoenixcontact.com/pc/products/2905909

Signal	
	Con

Connection method	Push-in connection
Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	1.5 mm²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	1.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	16
Stripping length	8 mm

#### Interfaces

Interface	MINI-USB type B
Maximum cable length	3 m

#### L

ED signaling	
Types of signaling	LED
Signal output: Transistor output, active	
Signalization designation	Alarm
Status display	LED
Color	red
Signal output: Transistor output, active	
Signalization designation	Battery mode
Status display	LED
Color	yellow
Signal output: Transistor output, active	
Signalization designation	Ready
Signal output	
Status display	LED
Color	green
Signal output	
Signalization designation	Battery charge
Status display	LED
Color	yellow
Signal output	
Signalization designation	Service
Status display	LED
Color	red

### Electrical properties



2905909

https://www.phoenixcontact.com/pc/products/2905909

Number of phases	1.00
roduct properties	
Product type	Uninterruptible power supply, AC
MTBF (IEC 61709, SN 29500)	> 206000 h (40 °C)
Insulation characteristics	
Protection class	I
Overvoltage category	III
Degree of pollution	2
Life expectancy (electrolytic capacitors)	
Time	32000 h
Dimensions	
Width	210 mm
Height	170 mm
Depth	136 mm
Installation dimensions	
Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm
Mounting	
Mounting type	DIN rail mounting
Material specifications	
Color	gray
Type of housing	DX51D+AZ (steel sheet / Galvalume)
Hood version	PC + ABS

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C 40 °C
Ambient temperature (storage/transport)	-15 °C 40 °C (with charged energy storage device)
Maximum altitude	≤ 3000 m (> 2000 m, observe derating)
Climatic class	3K3 (in acc. with EN 60721)
Max. permissible relative humidity (operation)	≤ 95 % (25 °C, non-condensing)
Shock	20g in all directions (EN 60068-2-27)
	30g in each space direction with UWA 130
Vibration (operation)	5 Hz 100 Hz, 0.7g (EN 60068-2-6)

### Standards and regulations



2905909

Standards	
Standard uninterruptible power supply systems	EN 62040-1
IC data	
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Conducted noise emission	EN 62040-02 (Class C2)
Interference emission	Noise emission in accordance with EN 62040-2
Noise immunity	Immunity in accordance with EN 62040-2
Electrostatic discharge	
Standards/regulations	EN 61000-4-2
Electrostatic discharge	
Contact discharge	6 kV (Test Level 3)
Discharge in air	8 kV (Test Level 3)
Comments	Criterion A
Electromagnetic HF field	
Standards/regulations	EN 61000-4-3
Electromagnetic HF field	
Frequency range	80 MHz 3 GHz
Test field strength	10 V/m
Comments	Criterion A
Fast transients (burst)	
Standards/regulations	EN 61000-4-4
Fast transients (burst)	
Input	2 kV (Test Level 3 - asymmetrical)
·	2 kV (Test Level 3 - asymmetrical)
Output	2 kV (Test Level 3 - asymmetrical)
Signal	2 kV (Test Level 3 - asymmetrical)
	2 kV (Test Level 3 - asymmetrical)
Comments	Criterion A (B for USB)
Surge voltage load (surge)	
Standards/regulations	EN 61000-4-5
Input	1 kV (Test Level 2 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Output	1 kV (Test Level 2 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Signal	1 kV (Test Level 2 - asymmetrical)
Comments	Criterion A



2905909

Conducted interference		
Standards/regulations	EN 61000-4-6	
Conducted interference		
Frequency range	0.15 MHz 80 MHz	
Comments	Criterion A	
Voltage	10 V	
Power frequency magnetic field		
Standards/regulations	EN 61000-4-8	
Frequency	50 Hz	
Test field strength	100 A/m	
Comments	Criterion A	
Emitted interference		
Emitted radio interference in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential	
Criterion A	Normal operating behavior within the specified limits.	
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.	




2905909

https://www.phoenixcontact.com/pc/products/2905909

### Drawings

### Block diagram

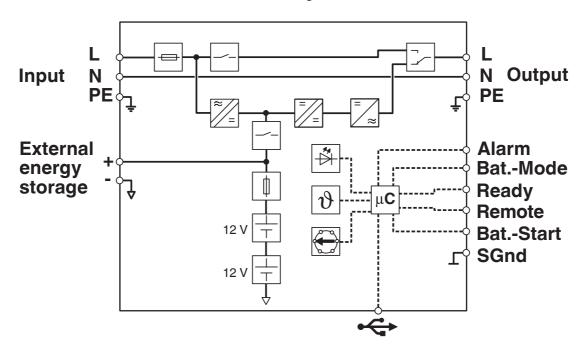



2905909

https://www.phoenixcontact.com/pc/products/2905909

### Approvals



IECEE CB Scheme

Approval ID: DK-56005-M1-UL



EAC

Approval ID: RU S-DE.BL08.W.00764



**DNV GL** 

Approval ID: TAA00002JM



EAC

Approval ID: RU-DE.B.00184/20



2905909

https://www.phoenixcontact.com/pc/products/2905909

### Classifications

#### **ECLASS**

201.00			
	ECLASS-9.0	27040705	
	ECLASS-10.0.1	27040705	
	ECLASS-11.0	27040705	
ETIM			
	ETIM 8.0	EC000382	
UNSPSC			
	UNSPSC 21.0	39121011	

May 6, 2022, 7:09 AM Page 13 (18)



2905909

https://www.phoenixcontact.com/pc/products/2905909

### **Environmental Product Compliance**

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 3
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"



2905909

https://www.phoenixcontact.com/pc/products/2905909

#### Accessories

#### Fuse

Fuse - FUSE 10A/400V GRL - 2908358

https://www.phoenixcontact.com/pc/products/2908358



Fuse, nominal current: 10 A, length: 31.8 mm, diameter: 6.35 mm

#### Fuse

Fuse - FUSE 40A/32V ATOF - 2908357

https://www.phoenixcontact.com/pc/products/2908357



Fuse, nominal current: 40 A, length: 19 mm, width: 5 mm, height: 18.8 mm



2905909

https://www.phoenixcontact.com/pc/products/2905909

#### Data cable

Data cable - MINI-SCREW-USB-DATACABLE - 2908217 https://www.phoenixcontact.com/pc/products/2908217



Used for communication between an industrial PC and Phoenix Contact devices with USB-Mini-B connection.

#### Uninterruptible power supply replacement battery

Uninterruptible power supply replacement battery - UPS-BAT-KIT/PB/2X12V/4AH - 1283116 https://www.phoenixcontact.com/pc/products/1283116



Replacement battery, VRLA-AGM, 2x12 V DC, 4 Ah. Only for 1274117 UPS-BAT/PB/24DC/4AH, 2320267 QUINT-UPS/24DC/24DC/10/3.4AH from V/C 06, 2905908 TRIO-UPS-2G/1AC/1AC/120V/750VA, and 2905909 TRIO-UPS-2G/1AC/1AC/230V/750VA



2905909

https://www.phoenixcontact.com/pc/products/2905909

#### Mounting adapter

Mounting adapter - UWA 130 - 2901664

https://www.phoenixcontact.com/pc/products/2901664



2-piece universal wall adapter for securely mounting the device in the event of strong vibrations. The profiles that are screwed onto the side of the device are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

#### Energy storage

Energy storage - QUINT-BAT/24DC/ 3.4AH - 2866349 https://www.phoenixcontact.com/pc/products/2866349



Energy storage device, lead AGM, VRLA technology, 24 V DC, 4 Ah. Connection via pin cable lug.



2905909

https://www.phoenixcontact.com/pc/products/2905909

### Energy storage

Energy storage - UPS-BAT/PB/24DC/4AH - 1274117 https://www.phoenixcontact.com/pc/products/1274117



Energy storage, VRLA-AGM, 24 V DC, 4 Ah, automatic detection and communication with QUINT UPS-IQ

Phoenix Contact 2022 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com