

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Primary-switched TRIO POWER power supply for DIN rail mounting, input: 3-phase, output: 24 V DC/5 A

---

## Product Description

TRIO POWER power supplies with standard functionality

TRIO POWER is particularly suited to standard machine production, thanks to 1- and 3-phase versions up to 960 W. The wide-range input and the international approval package enable worldwide use.

The robust metal housing, the high electric strength, and the wide temperature range ensure a high level of power supply reliability.

## Your advantages

- Use the third negative terminal block as a grounding terminal block and minimize installation costs
- Rugged design with metal housing and wide temperature range from -25 to +70°C
- Maximum operational reliability thanks to high MTBF (mean time between failures) of more than 500,000 hours and high dielectric strength of up to 300 V AC
- Compensation of voltage drops by means of output voltage that can be adjusted on the front

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2866462             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product Key                          | CMPT33              |
| Catalog Page                         | Page 176 (C-6-2013) |
| GTIN                                 | 4046356128544       |
| Weight per Piece (including packing) | 743.7 g             |
| Weight per Piece (excluding packing) | 600 g               |
| Customs tariff number                | 85044030            |
| Country of origin                    | CN                  |

## Technical Data

### Input data

#### AC operation

|  |  |
|--|--|
| Nominal input voltage range              | 2x / 3x 400 V AC ... 500 V AC  |
| Input voltage range                      | 3x 320 V AC ... 575 V AC (for 3-phase operation)<br>2x 360 V AC ... 575 V AC (for 2-phase operation) |
| Input voltage range AC                   | 3x 320 V AC ... 575 V AC (for 3-phase operation)<br>2x 360 V AC ... 575 V AC (for 2-phase operation) |
| Voltage type of supply voltage           | AC   |
| Inrush current                           | < 15 A   |
| Inrush current integral ( $I^2t$ )       | 0.2 A <sup>2</sup> s   |
| AC frequency range                       | 45 Hz ... 65 Hz  |
| Mains buffering time                     | > 20 ms (3x 400 V AC)<br>> 30 ms (3x 480 V AC)   |
| Current consumption                      | 3x 0.3 A (400 V AC)<br>3x 0.25 A (500 V AC)<br>2x 0.65 A (400 V AC)<br>2x 0.5 A (500 V AC)           |
| Nominal power consumption                | 211 VA   |
| Protective circuit                       | Transient surge protection; Varistor   |
| Power factor (cos phi)                   | 0.64   |
| Typical response time                    | < 1 s  |
| Permissible backup fuse                  | B6 B10 B16   |
| Recommended breaker for input protection | 6 A ... 16 A (Characteristics B, C, D, K)  |
| Discharge current to PE                  | < 3.5 mA   |

### Output data

|  |   |
|--|---|
| Efficiency   | 89 % (at 400 V AC and nominal values)   |
| Output characteristic                              | U/I   |
| Nominal output voltage                             | 24 V DC $\pm$ 1 %   |
| Setting range of the output voltage ( $U_{Set}$ )  | 22.5 V DC ... 29.5 V DC (> 24 V DC, constant capacity restricted)   |
| Nominal output current ( $I_N$ )                   | 5 A ( $U_{OUT} = 24$ V DC)  |
| Derating   | 55 °C ... 70 °C (2.5%/K)  |
| Feedback voltage resistance                        | 35 V DC   |
| Protection against overvoltage at the output (OVP) | < 35 V DC   |
| Max. capacitive load                               | unlimited   |
| Active current limitation                          | Approx 6 A (in the event of a short-circuit)  |
| Control deviation                                  | < 1 % (change in load, static 10 % ... 90 %)<br>< 2 % (change in load, dynamic 10 % ... 90 %)<br>< 0.1 % (change in input voltage $\pm$ 10 %) |
| Residual ripple                                    | < 30 mV <sub>PP</sub>   |
| Output power                                       | 120 W   |

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

|                                      |  |
|--------------------------------------|--|
| Peak switching voltages nominal load | < 30 mV <sub>PP</sub>                      |
| Maximum no-load power dissipation    | 4 W  |
| Power loss nominal load max.         | 15 W                                       |
| Rise time                            | < 2 ms (U <sub>OUT</sub> (10 % ... 90 %))  |
| Connection in parallel               | yes, for redundancy and increased capacity |
| Connection in series                 | yes  |

## Connection data

### Input

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 14                  |
| Stripping length                      | 9 mm                |
| Screw thread                          | M2,5                |
| Tightening torque, min                | 0.4 Nm              |
| Tightening torque max                 | 0.5 Nm              |

### Output

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 16                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 9 mm                |
| Screw thread                          | M2,5                |
| Tightening torque, min                | 0.4 Nm              |
| Tightening torque max                 | 0.5 Nm              |

## LED signaling

|                           |           |
|---------------------------|-----------|
| Types of signaling        | LED       |
| Operating voltage display | Green LED |

### Signal output

|                        |  |
|------------------------|--|
| Status display         | "DC OK" LED green                        |
| Note on status display | U <sub>OUT</sub> > 21.5 V: LED lights up |

## Electrical properties

|                                 |                        |
|---------------------------------|------------------------|
| Insulation voltage input/output | 4 kV AC (type test)    |
|                                 | 2 kV AC (routine test) |

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

|                                |                         |
|--------------------------------|-------------------------|
| Insulation voltage output / PE | 500 V DC (routine test) |
| Insulation voltage input / PE  | 2 kV AC (type test)     |
|                                | 2 kV AC (routine test)  |

## Product properties

|                            |              |
|----------------------------|--------------|
| Product type               | Power supply |
| MTBF (IEC 61709, SN 29500) | > 1474000 h  |

## Insulation characteristics

|                      |                        |
|----------------------|------------------------|
| Protection class     | I (with PE connection) |
| Overvoltage category | III                    |
| Degree of pollution  | 2                      |

## Dimensions

|        |        |
|--------|--------|
| Width  | 40 mm  |
| Height | 130 mm |
| Depth  | 115 mm |

## Installation dimensions

|                                  |               |
|----------------------------------|---------------|
| Installation distance right/left | 0 mm / 0 mm   |
| Installation distance top/bottom | 50 mm / 50 mm |

## Mounting

|                       |  |
|-----------------------|--|
| Assembly instructions | alignable: horizontally 0 mm, vertically 50 mm |
| Mounting position     | horizontal DIN rail NS 35, EN 60715            |

## Material specifications

|                      |                          |
|----------------------|--------------------------|
| Color                | aluminium                |
| Type of housing      | Steel sheet, zinc-plated |
| Side element version | Aluminum                 |

## Environmental and real-life conditions

### Ambient conditions

|  |   |
|--|---|
| Degree of protection                           | IP20  |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 55° C derating : 2.5%/K)            |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C  |
| Climatic class                                 | 3K3 (in acc. with EN 60721)                             |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)                       |
| Shock  | 15g in all directions in acc. with IEC 60068-2-27       |
| Vibration (operation)                          | < 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6) |
|  | 15 Hz ... 150 Hz, 2.3g, 90 min.                         |

## Standards and regulations

|  |                          |
|--|--------------------------|
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV) |
|--|--------------------------|

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

|  |                            |
|--|----------------------------|
| Standard – Limitation of mains harmonic currents   | EN 61000-3-2               |
| Standard - Electrical safety   | EN 60950-1/VDE 0805 (SELV) |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178                   |
| Standard – Safety extra-low voltage  | EN 60950-1 (SELV)          |
|  | EN 60204 (PELV)            |
| Standard - Safe isolation  | DIN VDE 0100-410           |

## Approval data

|              |                               |
|--------------|-------------------------------|
| UL approvals | UL/C-UL listed UL 508         |
|              | UL/C-UL Recognized UL 60950-1 |

## Conformity/Approvals

|                                  |   |
|----------------------------------|---|
| SIL in accordance with IEC 61508 | 0 |
|----------------------------------|---|

## EMC data

|                                     |   |
|-------------------------------------|---|
| Low Voltage Directive               | Conformance with Low Voltage Directive 2014/35/EC |
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU         |
| EMC requirements for noise emission | EN 61000-6-3                                      |
|                                     | EN 61000-6-4                                      |
| EMC requirements for noise immunity | EN 61000-6-1                                      |
|                                     | EN 61000-6-2                                      |
| Noise immunity                      | EN 61000-6-2:2005                                 |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|                   |                     |
|-------------------|---------------------|
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air  | 8 kV (Test Level 3) |
| Comments          | Criterion A         |

## Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                  |
|---------------------|------------------|
| Frequency range     | 80 MHz ... 1 GHz |
| Test field strength | 10 V/m           |
| Frequency range     | 1 GHz ... 2 GHz  |
| Test field strength | 10 V/m           |
| Frequency range     | 2 GHz ... 3 GHz  |
| Test field strength | 10 V/m           |
| Comments            | Criterion A      |

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

|          |                                    |
|----------|------------------------------------|
| Input    | 4 kV (Test Level 4 - asymmetrical) |
| Output   | 4 kV (Test Level 4 - asymmetrical) |
| Signal   | 2 kV (Test Level 3 - asymmetrical) |
| Comments | Criterion A                        |

## Surge voltage load (surge)

|                       |   |
|-----------------------|---|
| Standards/regulations | EN 61000-4-5  |
| Input                 | 2 kV (Test Level 3 - symmetrical)<br>4 kV (Test Level 4 - asymmetrical) |
| Output                | 1 kV (Test Level 2 - symmetrical)<br>2 kV (Test Level 3 - asymmetrical) |
| Comments              | Criterion A   |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|                 |                     |
|-----------------|---------------------|
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments        | Criterion A         |
| Voltage         | 10 V (Test Level 3) |

## Conducted interference

|                 |                     |
|-----------------|---------------------|
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments        | Criterion A         |
| Voltage         | 10 V (Test Level 3) |

## Voltage dips

|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
|-----------------------|---------------|

## Emitted interference

|  |  |
|--|--|
| Standards/regulations                            | EN 61000-6-3   |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |


# Power supply unit - TRIO-PS/3AC/24DC/ 5

2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Drawings

Block diagram

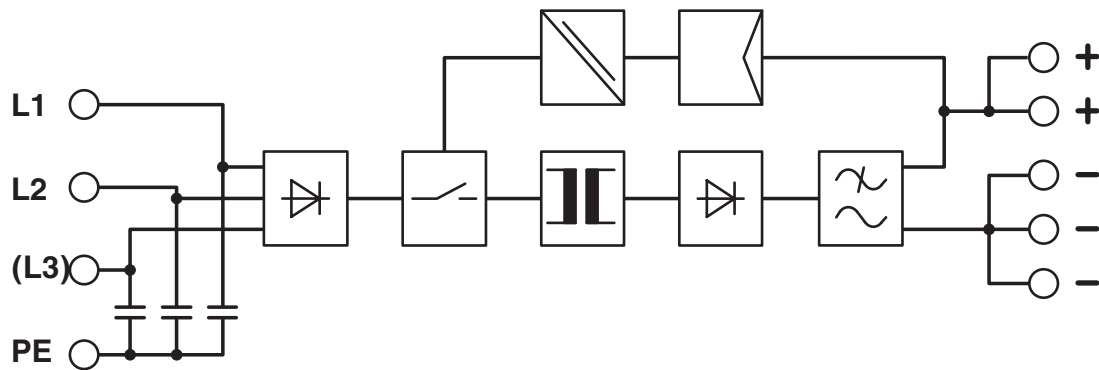



# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Approvals

cUL Recognized 

UL Recognized 

EAC 

EAC 

UL Listed 

cUL Listed 

EAC 

cULus Recognized

cULus Listed

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27040701 |
| ECLASS-10.0.1 | 27040701 |
| ECLASS-11.0   | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121004 |
|-------------|----------|

# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 25;<br>For details about hazardous substances go to tab "Downloads",<br>Category "Manufacturer's declaration" |

# Power supply unit - TRIO-PS/3AC/24DC/ 5

2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Accessories

### DIN rail adapter

DIN rail adapter - UTA 107 - 2853983

Universal DIN rail adapter, for screwing on switchgear




---

### Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-3S-230-FM - 2905230

Plug-in device protection, according to type 3/class III, for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE), with integrated surge-proof fuse and remote indication contact.



# Power supply unit - TRIO-PS/3AC/24DC/ 5



2866462

<https://www.phoenixcontact.com/il/products/2866462>

## Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-24-FM-UT - 2907916



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

---

## Mounting adapter

Mounting adapter - UWA 182/52 - 2938235



Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

---

Phoenix Contact 2022 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Israel Ltd.  
P.O.B. 1799 Industrial Park Hasharon  
Quadima 60920  
+972-9-8915700  
[info@phoenixcontact.co.il](mailto:info@phoenixcontact.co.il)